



Form

A new collection of textured
woods and stones

amtico
makes it
possible



Contents:

Introduction	5
Artisan Emboss Wood	6
Natural Wood Grain Emboss	14
Contemporary Ceramic	18
Stripping	22
Product Availability	23
Amtico Collections Explained	24
Technical Specification	26



Bureau Oak in Stripwood Laying Pattern



◀ **Contemporary Ceramic** Calm and cool, stylish and simple. See page 18



▲ **Artisan Emboss Wood** For natural texture and an authentic look and feel. See page 6



▶ **Natural Wood Grain Emboss** For distinct character and a realistic appearance. See page 14



What is Amtico Form?

Amtico Form is a complete collection of distinctive flooring, perfect for today's work and life style.

The hard-wearing, 0.7mm wear layer not only gives this flooring long-lasting protection, but the heavy embossing gives it an authentic, distressed appearance. By replicating the natural grain and knots of real wood, the natural wood grain emboss will add charm and intrigue to your space.

Featuring striking texture and deep embossing, Amtico Form gives you charm and character. If you're looking for the appearance of real wood or stone, then this is the collection for you. This durable flooring is easy to maintain and is warm and comfortable underfoot, making it the perfect choice for different commercial spaces.



12YR COMMERCIAL WARRANTY



Drift Oak in Stripwood Laying Pattern

Amtico Form
Artisan Emboss Wood



Textured flooring always works well with a classic laying pattern such as Stripwood.

A timeless classic

Amtico Form Artisan Emboss Wood has a charming and authentic appearance thanks to its hand-crafted grooves.

Each wood in this collection has an inherent uniqueness which is enhanced by the distressed texture. This hard-wearing flooring is built to last and its ever-appealing nature is full of life and character.

Amtico Form

Artisan Emboss Wood

The inviting colour palette includes soft neutrals as well as natural and deeper shades of oak.



Sienna Oak

FS7W9110




Drift Oak

FS7W9020



Rural Oak

FS7W5950

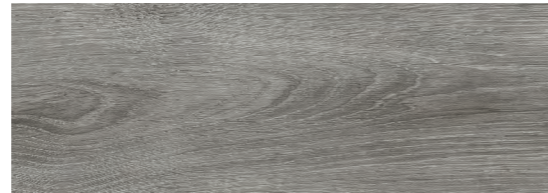

Valley Oak

FS7W9040



Cottage Limed Wood

FS7W5940



Cabin Oak

FS7W9070



Carved Oak

FS7W5960




Native Grey Wood

FS7W9060



Bureau Oak

FS7W5970

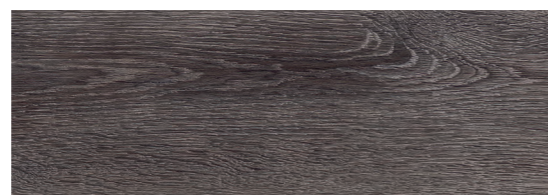


Burnished Timber

FS7W9080



Oiled Timber

FS7W5980

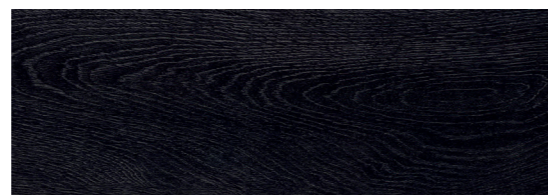

Coal Grained Oak

FS7W9100



Rural Oak in Parquet Laying Pattern

Artisan Emboss Wood | Parquet



Coal Grained Oak in Parquet Laying Pattern



Classically beautiful and stunning in its simplicity, our range of parquet flooring is a timeless choice which will add an air of elegance to any hotel or office space.

This chic and sophisticated design lends itself to both traditional and modern commercial spaces, giving your interior a classic yet contemporary twist.

Amtico Form


Artisan Emboss Wood | Parquet

A sophisticated, natural palette which lends itself perfectly to the timeless charm of Parquet flooring.



Rural Oak

FS7W5950

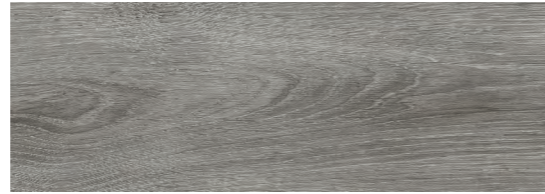

Valley Oak

FS7W9040



Carved Oak

FS7W5960



Sienna Oak

FS7W9110



Oiled Timber

FS7W5980



Coal Grained Oak

FS7W9100



It's all in the design

Parquet has been used throughout history to create impressive and distinctive floors. With an ever-appealing charm, this pattern really captures the beauty of our Artisan Emboss Wood range.

If you really want to make a feature of the authentic textures and varied beauty of Amtico Form, a Parquet is the perfect choice. The versatile yet enduring pattern creates a flooring style suitable for a wide range of interiors.



Rural Oak in Parquet Laying Pattern



Barrel Oak Dovetail in Stripwood Laying Pattern

Amtico Form
Natural Wood Grain Emboss



4 The strong grain of this embossed flooring stands out effortlessly in a Stripwood laying pattern.

Feel the difference

Bring your senses to life as you see and feel the strongly embossed nature of this Amtico Form Natural Wood Grain Emboss flooring.

The beauty of this flooring comes from the intense nature of the embossed texture and the raised effect of the grain adds depth and character, really bringing the space to life.



Barrel Oak Trestle in Stripwood Laying Pattern

Natural Wood Grain Emboss

With a versatile colour palette ranging from contemporary charcoal and greys to warm honey and amber, there is something to suit all tastes.



Barrel Oak Cotton

FK7W3302



Barrel Oak Smoke

FK7W3308



Barrel Oak Rye

FK7W3303



Barrel Oak Dovetail

FK7W3306



Barrel Oak Dune

FK7W3307




Barrel Oak Grey

FK7W3300



Barrel Oak Sand

FK7W3304

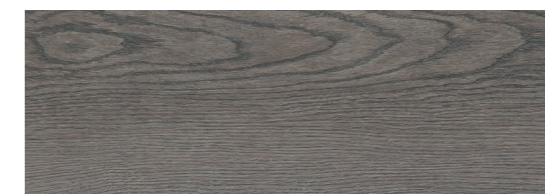


Barrel Oak Ashen

FK7W3309



Barrel Oak Trestle

FK7W3301

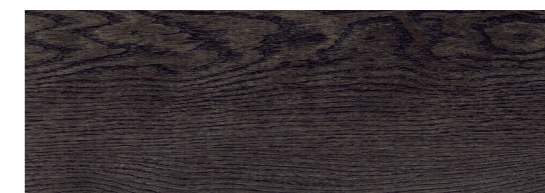

Barrel Oak Charcoal

FK7W3305

Contemporary Ceramic



Mineral in Broken Bond Laying Pattern with Concrete Pale Stripping



Choose Contemporary Ceramic in an eye-catching laying pattern such as Herringbone.

Stylish and sophisticated

Sleek and stylish, sophisticated and refined, Contemporary Ceramic remains a popular choice for flooring.

The eye is drawn to the subtle changes in colour that replicate the appearance of stone. Complete the look with a contrasting stripping for an elegant finish.

Amtico Form

Contemporary Ceramic

From the cool, cream Crema to the dark, bold Jet, there is a Contemporary Ceramic floor for every space.



Opal

FS7S4380



Crema

FS7S4370



Silt

FS7S4360



Mineral

FS7S4350



Tidal

FS7S4340



Jet

FS7S4320

- We recommend laying with accent strips due to higher color variations within the tiles. Color variations are no cause for complaint, it reflects a natural reproduction of the original pattern.
- Wir empfehlen eine Verlegung mit Akzentstreifen, bedingt durch höhere Farbvariationen innerhalb der Fliesen. Farbvariationen sind kein Grund zur Beanstandung, es spiegelt eine natürliche Reproduktion des Originalmusters wieder.
- Nous recommandons une pose avec filets du fait des variations de nuances d'une dalle à l'autre. Ces variations de nuances ont pour finalité un rendu naturel semblable à celui d'une pierre authentique.
- För att återge ett så naturoget utseende som möjligt har stenmönstren i kollektionen ganska stora variationer i färgnyans och vi rekommenderar därför att alla stenmönster installeras med stripping mellan plattorna. Nyansvariationerna är inte ett skäl för reklamation då de är en naturlig del av designerna.



For product availability please see page 23.



Silt in Herringbone Laying Pattern with Mirabelle Creme Stripping

Stripping

Stripping is the perfect way to set off the very subtle variations in colour that run through Amtico Form.

	American Oak (cross grain)	AROW7050
	Bronze	AROAMP18
	Cirrus Air	AROW8100
	Concrete Pale	AROSCN30
	Fused Birch (cross grain)	AROW7500
	Gold	AROAMP78
	Mirabelle Creme	AROSMB14
	Pure Plain Black	AROAPN22

	Pure Plain White	AROAPN11
	Shimmer Denim	AROASE39
	Silver	AROAMP38
	Stria Basalt	AROSMS43
	Stria Sediment	AROSMS14
	Stria Volcanic	AROSMS42
	Wenge Wood (cross grain)	AROW7490
	Wild Walnut (cross grain)	AROW7620

Feature stripping is available in the following sizes, 2 mm thickness


- 3.2 mm x 914.4 mm
- 6.4 mm x 914.4 mm
- 9.5 mm x 914.4 mm
- 12.7 mm x 914.4 mm
- 19.1 mm x 914.4 mm

Product Availability

Artisan Emboss Wood					Size (Straight Grain)	
Product Name	Product Code	Tile Thickness (mm)	Wear Layer Thickness (mm)	Surface Finish	152.4 x 914.4mm 6 x 36" 2,51 m ² per Box	228.6 x 76.2mm 3 x 9" (Parquet) 2,51 m ² per Box
Sienna Oak	FS7W9110	2.5	0.7	Artisan Emboss	Y	Y
Drift Oak	FS7W9020	2.5	0.7	Artisan Emboss	Y	
Rural Oak	FS7W5950	2.5	0.7	Artisan Emboss	Y	Y
Valley Oak	FS7W9040	2.5	0.7	Artisan Emboss	Y	Y
Cottage Limed Wood	FS7W5940	2.5	0.7	Artisan Emboss	Y	
Cabin Oak	FS7W9070	2.5	0.7	Artisan Emboss	Y	
Carved Oak	FS7W5960	2.5	0.7	Artisan Emboss	Y	Y
Native Grey Wood	FS7W9060	2.5	0.7	Artisan Emboss	Y	
Bureau Oak	FS7W5970	2.5	0.7	Artisan Emboss	Y	
Burnished Timber	FS7W9080	2.5	0.7	Artisan Emboss	Y	
Oiled Timber	FS7W5980	2.5	0.7	Artisan Emboss	Y	Y
Coal Grained Oak	FS7W9100	2.5	0.7	Artisan Emboss	Y	Y

Natural Wood Grain Emboss					Size (Straight Grain)	
Product Name	Product Code	Tile Thickness (mm)	Wear Layer Thickness (mm)	Surface Finish	177.8 x 1220.4mm 7 x 48.05" 3,26 m ² per Box	235 x 1505mm 9.25 x 59.25" 3,54 m ² per Box
Barrel Oak Cotton	FK7W3302	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Smoke	FK7W3308	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Rye	FK7W3303	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Dovetail	FK7W3306	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Dune	FK7W3307	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Grey	FK7W3300	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Sand	FK7W3304	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Ashen	FK7W3309	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Trestle	FK7W3301	2.5	0.7	Natural Wood Grain Emboss	Y	Y
Barrel Oak Charcoal	FK7W3305	2.5	0.7	Natural Wood Grain Emboss	Y	Y

Contemporary Ceramic					Size (Straight Grain)	
Product Name	Product Code	Tile Thickness (mm)	Wear Layer Thickness (mm)	Surface Finish	304.8 x 609.6mm 12 x 24" 2,60 m ² per Box	
Opal	FS7S4380	2.5	0.7	Ceramic	Y	
Crema	FS7S4370	2.5	0.7	Ceramic	Y	
Silt	FS7S4360	2.5	0.7	Ceramic	Y	
Mineral	FS7S4350	2.5	0.7	Ceramic	Y	
Tidal	FS7S4340	2.5	0.7	Ceramic	Y	
Jet	FS7S4320	2.5	0.7	Ceramic	Y	

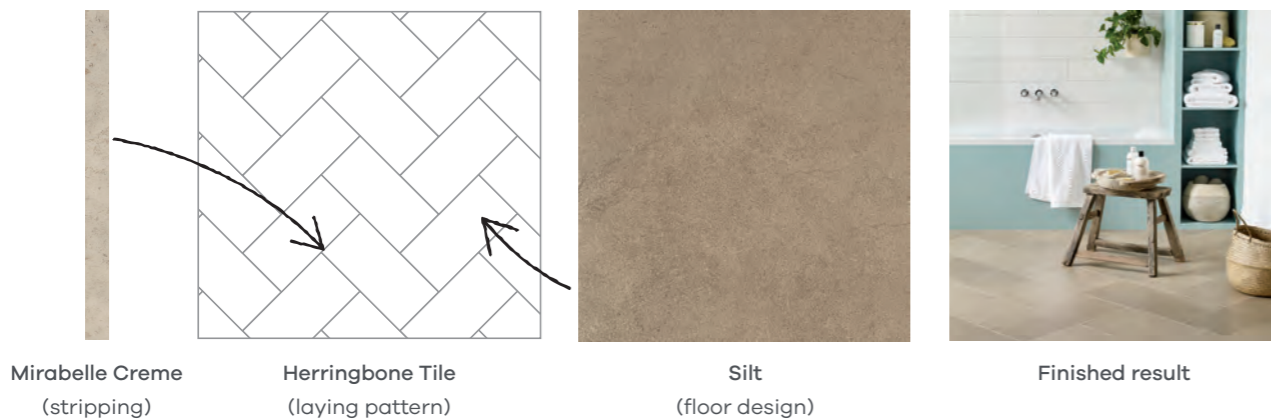

Amtico Collections Explained

1. Signature

Amtico Signature is our collection of premium, design-led products.

It is available individually or in a combination of laying patterns, borders and motifs, giving you the freedom to create a floor that is unique to you.

Alternatively, you can opt for something beautifully simple and stylish, without additional borders and motifs.



20YR COMMERCIAL WARRANTY

Amtico Signature has an extra hard-wearing surface with a 1mm protective wear layer and a 20-year warranty for total peace of mind.

2. Form

Amtico Form is an enduring collection, rich with texture and embosses, that perfectly suits modern and traditional spaces alike.

Choose from authentic, highly textured wood or cool and contemporary stone in this versatile collection. With its granular appearance and strong embossing, Amtico Form is a collection of timeless designs that really makes a statement in your home.



12YR COMMERCIAL WARRANTY

Amtico Form is a long-lasting flooring collection with 0.7 mm wear layer and a 12-year warranty.

3. Spacia

Amtico Spacia is an accessible collection of flooring with a wide choice of Wood, Stone and Abstract products where the hard work is done for you.

Amtico Spacia is at the forefront of craftman-ship and interior design. Choose from stunning colours in a mix of styles and add your choice of laying pattern to complete the look.



10YR COMMERCIAL WARRANTY

Amtico Spacia comes complete with a 0.5mm wear layer and the reassurance of a 10-year warranty.



Amtico Form

Technical Specification

FOR-TS-20170419-01-EU

Name	Prüfnorm	Symbol	Result Natural Wood Grain Emboss	Result Artisan Emboss Wood & Contemporary Ceramic
CE / DOP	EN 14041		CPR/AI/013	CPR/AI/013
Usage Classification	EN 685 EN ISO 10874		23, 34, 43	23, 34, 43
Manufacturing Standard	EN 649 EN ISO 10582		Pass	Pass
Total Thickness	EN 428 EN ISO 24346		2,5 mm	2,5 mm
Wear Layer Thickness	EN 429 EN ISO 24340		0,70 mm	0,70 mm
Weight	EN 430 EN ISO 23997		3,277 g/m ²	3,472 g/m ²
Abrasion Resistance	EN 649 EN ISO 10582		Group T Type 1	Group T Type 1
Residual Indentation	EN 433 EN ISO 24343-1		≤ 0,1 mm	≤ 0,1 mm
Dimensional Stability	EN 434 EN ISO 23999		≤ 0,25 %	≤ 0,25 %
Dimensional Stability / Curling	EN 434 EN ISO 23999		≤ 2 mm	≤ 2 mm
Flexibility	EN 435 EN ISO 24344 method A		Pass	Pass
Slip Resistance	DIN 51130 EN 13893 BS 7976		R10* Class DS see separate table	R10* Class DS see separate table
Chemical Resistance	EN 423 EN ISO 26987		Excellent	Excellent
Colour Fastness to Light	EN ISO 105-B02		≥ 6	≥ 6
Flammability / Smoke Emissions	EN 13501-1		B _n -s1	B _n -s1
Castor Chair Resistance (Type W)	EN 425 EN ISO 4918		Pass	Pass
Impact Sound Insulation	EN ISO 717-2		3 dB	3 dB
Thermal Resistance	EN 12664		0,016 m ² K/W (underfloor heating suitable)	0,016 m ² K/W (underfloor heating suitable)
Electrostatic Performance	ISO 6356 EN 1815		≤ 2 kV	≤ 2 kV
Emissions	AgBB, Belgium		Pass	Pass
Emissions	French VOC regulatoin	Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).	A+	A+
Emissions	M1		Pass	n/a
UPEC			n/a	to be accredited
Environment	BRE Green Guide		A/A+ rating Generic Specification	A/A+ rating Generic Specification
Phthalate Free		Amtico Form products are manufactured using both phthalate free and biobased plasticisers except for recycled content.	Yes	Yes
Surface treatment			Urethane	Urethane

* for safety flooring with long-term retention of slip resistance refer to the Amtico Assura range.

Amtico Form

Technische Daten

FOR-TS-20170504-01-DE

Bezeichnung	Standard	Symbol	Ergebnis Natural Wood Grain Emboss	Ergebnis Artisan Embossed Wood & Contemporary Ceramic
CE / DOP	EN 14041		CPR/AI/013	CPR/AI/013
Klassifizierung	EN 685 EN ISO 10874		23, 34, 43	23, 34, 43
Herstellungsnorm	EN 649 EN ISO 10582		Bestanden	Bestanden
Gesamtdicke	EN 428 EN ISO 24346		2,5 mm	2,5 mm
Nutzschichtdicke	EN 429 EN ISO 24340		0,70 mm	0,70 mm
Gewicht	EN 430 EN ISO 23997		3,277 g/m ²	3,472 g/m ²
Verschleißfestigkeit	EN 649 EN ISO 10582		Gruppe T Typ 1	Gruppe T Typ 1
Resteindruck	EN 433 EN ISO 24343-1		≤ 0,1 mm	≤ 0,1 mm
Dimensionsstabilität	EN 434 EN ISO 23999		≤ 0,25 %	≤ 0,25 %
Dimensionsstabilität / Curling	EN 434 EN ISO 23999		≤ 2 mm	≤ 2 mm
Flexibilität	EN 435 EN ISO 24344 method A		Bestanden	Bestanden
Rutschhemmstufe	DIN 51130 EN 13893 BS 7976		R10 Class DS	R10 Class DS
Chemikalienbeständigkeit	EN 423 EN ISO 26987		Sehr gut	Sehr gut
Lichtechtheit	EN ISO 105-B02		≥ 6	≥ 6
Brandverhalten	EN 13501-1		B _n -s1	B _n -s1
Stuhlrollenbeanspruchung (Typ W)	EN 425 EN ISO 4918		Bestanden	Bestanden
Trittschallverbesserungsmaß	EN ISO 717-2		3 dB	3 dB
Wärmedurchlasswiderstand	EN 12664		0,016 m ² K/W (geeignet für Fußbodenheizung)	0,016 m ² K/W (geeignet für Fußbodenheizung)
Elektrostatisches Verhalten	ISO 6356 EN 1815		≤ 2 kV	≤ 2 kV
Emissionsverhalten	AgBB, Belgium		Bestanden	Bestanden
Emissions COV	French VOC regulatoin	Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).	A+	A+
Emissionsverhalten	M1		Bestanden	n/a
UPEC			n/a	Genehmigungsverfahren in Prozess
Umwelt	BRE Green Guide		A/A+ rating Generic Specification	A/A+ rating Generic Specification
Phthalate-frei		Amtico Form wird mit phthalate-freien und biologischen Weichmachern produziert (mit Ausnahme von Recyclat).	Ja	Ja
Oberflächenschutz			Polyurethan	Polyurethan

Amtico Form

Specifications Techniques

FOR-TS-20170503-01-FR

Name	Norme	Symbole	Résultat Natural Wood Grain Emboss	Résultat Artisan Emboss Wood & Contemporary Ceramic
CE / DOP	EN 14041		CPR/AI/013	CPR/AI/013
Classification d'Usage	EN 685 EN ISO 10874		23, 34, 43	23, 34, 43
Norme de Fabrication	EN 649 EN ISO 10582		Conforme	Conforme
Epaisseur Totale	EN 428 EN ISO 24346		2,5 mm	2,5 mm
Epaisseur de la couche d'Usure	EN 429 EN ISO 24340		0,70 mm	0,70 mm
Poids	EN 430 EN ISO 23997		3,277 g/m ²	3,472 g/m ²
Résistance à l'Abrasion	EN 649 EN ISO 10582		Groupe T Type 1	Groupe T Type 1
Poinçonnement Rémanent	EN 433 EN ISO 24343-1		≤ 0,1 mm	≤ 0,1 mm
Poinçonnement Rémanent	EN 434 EN ISO 23999		≤ 0,25 %	≤ 0,25 %
Curling	EN 434 EN ISO 23999		≤ 2 mm	≤ 2 mm
Flexibilité	EN 435 EN ISO 24344 method A		Conforme	Conforme
Résistance au Glissement	DIN 51130 EN 13893 BS 7976		R10* Classe DS Voir tableau séparé	R10* Classe DS Voir tableau séparé
Résistance aux produits Chimiques	EN 423 EN ISO 26987		Excellent	Excellent
Solidité des coloris à la lumière valeur seuil	EN ISO 105-B02		≥ 6	≥ 6
Réaction au feu - Euroclasse	EN 13501-1		B _n -s1	B _n -s1
Résistance à la chaise à roulette (Type W)	EN 425 EN ISO 4918		Conforme	Conforme
Efficacité acoustique au bruit de chocs ΔLw	EN ISO 717-2		3 dB	3 dB
Résistance Thermique	EN 12664		0,016 m ² K/W (underfloor heating suitable)	0,016 m ² K/W (underfloor heating suitable)
Accumulation de Charges Electrostatiques	ISO 6356 EN 1815		≤ 2 kV	≤ 2 kV
Emissions	AgBB, Belgium		Conforme	Conforme
Emissions dans l'air Etiquetage Français			A+	A+
Emissions	M1		Conforme	n/a
UPEC			n/a	to be accredited
Environment	BRE Green Guide		A/A+ rating Generic Specification	A/A+ rating Generic Specification
Phthalate Free			Oui	Oui
Traitement de Surface			Uréthane	Uréthane

* Pour des sols de sécurité accrue avec une résistance au glissement sur le long terme, se référer à la gamme Amtico Assura .

Amtico Form

Teknisk Specification

FOR-TS-20170511-01-SE

Namn	Standard	Symbol	Resultat Natural Wood Grain Emboss	Resultat Artisan Emboss Wood & Contemporary Ceramic
CE / DOP	EN 14041		CPR/AI/013	CPR/AI/013
Bruksklassificering	EN 685 EN ISO 10874		23, 34, 43	23, 34, 43
Tillverkningsstandard	EN 649 EN ISO 10582		Uppfyller kraven	Uppfyller kraven
Total Tjocklek	EN 428 EN ISO 24346		2,5 mm	2,5 mm
Tjocklek Slitskikt	EN 429 EN ISO 24340		0,70 mm	0,70 mm
Vikt	EN 430 EN ISO 23997		3,277 g/m ²	3,472 g/m ²
Nötningsbeständighet	EN 649 EN ISO 10582		Grupp T Typ 1	Grupp T Typ 1
Intrycksbeständighet /restintryck	EN 433 EN ISO 24343-1		≤ 0,1 mm	≤ 0,1 mm
Dimensionsstabilitet	EN 434 EN ISO 23999		≤ 0,25 %	≤ 0,25 %
Dimensionsstabilitet / Curling	EN 434 EN ISO 23999		≤ 2 mm	≤ 2 mm
Flexibilitet	EN 435 EN ISO 24344 method A		Uppfyller kraven	Uppfyller kraven
Halkmotstånd	DIN 51130 EN 13893 BS 7976		R10* Class DS se separat tabell	R10* Class DS se separat tabell
Kemikalietålighet	EN 423 EN ISO 26987		Utmärkt	Utmärkt
Ljusstabilitet	EN ISO 105-B02		≥ 6	≥ 6
Brandklass	EN 13501-1		B _n -s1	B _n -s1
Tålighet för rullande stolshjul (Type W)	EN 425 EN ISO 4918		Godkänd	Godkänd
Stegljudsreduktion	EN ISO 717-2		3 dB	3 dB
Värmegenomgång	EN 12664		0,016 m ² K/W (underfloor heating suitable)	0,016 m ² K/W (underfloor heating suitable)
Elektrostatisk uppladdning	ISO 6356 EN 1815		≤ 2 kV	≤ 2 kV
Emissioner	AgBB, Belgium		Uppfyller kraven	Uppfyller kraven
Emissioner	French VOC regulatoin		A+	A+
Emissioner	M1		Uppfyller kraven	n/a
UPEC			n/a	to be accredited
Miljö	BRE Green Guide		A/A+ rating Generic Specification	A/A+ rating Generic Specification
Ftalatfri			Ja	Ja
Ytbehandling			PUR-behandlad yta	PUR-behandlad yta

* För halkhämmande golv hänvisar vi till Amtico Assura kollektionen.

amtico
makes it
possible

**Amtico UK &
European Sales**

Solar Park Southside
Solihull, West Midlands
B90 4SH
+44 (0) 121 745 0800
samples@amtico.com

Amtico Head Office

Kingfield Road
Coventry
CV6 5AA
+44 (0) 24 7686 1400
samples@amtico.com

**Amtico International
Germany**

Im Taubental 11
41468 Neuss
+49 (0) 2131 359 16 0
info@amtico.de

**Amtico International
France**

12 Rue Pernelle
75004 Paris
+33 (0) 1 55 38 95 70
info@amtico.fr

**Amtico International
Scandinavia**

Isafjordsgatan 22
164 40 Kista
+46 (0) 8 584 233 24
info@amtico.se

Amtico International Asia

Unit 1907, 19th Floor
Paul Y. Centre
51 Hung To Road, Kwun Tong
Kowloon, Hong Kong
+852 2327 7703
samples@amtico.com

**Amtico International
Middle East, Africa & India**

8th Floor
Building Number 2
J&G DMCC, Dubai, UAE
+44 (0) 121 745 0800
samples@amtico.com

amtico.com

Visit amtico.com for more information on our product range, inspiring ideas, maintenance and installation advice. The policy of the Company is one of continuous development and improvement and the right is reserved to add or delete from the range or change patterns without prior notification. All metric sizes are rounded. All products are manufactured in line with EN649, EN ISO 10582. Brochure correct at the time of printing.

antico
makes it
possible

Version 1, May 2017.